

Certex Coil Hook with Counterweight


Product information



General: Coil hook for lifting and handling of coils and similar loads with a center of gravity below the tine while transport.

Design: Lifting eye, handle, rounded tine, counterweight (only for positioning the empty coil hook to improve balancing and positioning).

Note: The center of gravity of the coil must always be below the crane hook slightly toward the back of the coil hook. The tine tip will face upwards (ideally approx. 3°) to achieve an acceptable

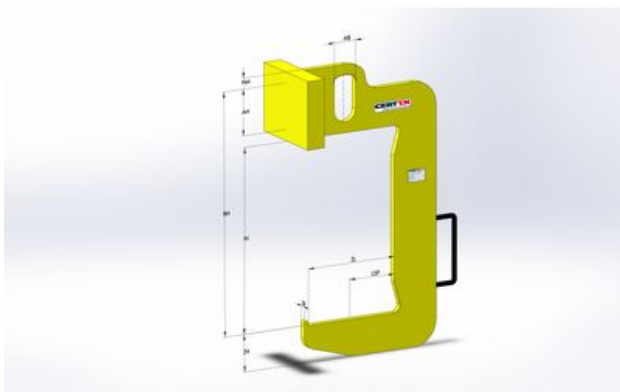

WLL ton	Coil hook without counterweight	AB	AH	BH	HM	IH	LSP	ZB	ZH	ZL	Weight kg	Delivery time
0.5	16.805	50	100	625	16	500	55	10	40	105	4	7
0.5	16.805	50	100	525	16	400	80	10	50	155	5	7
0.5	16.805	50	100	425	16	300	105	10	60	205	6	7
0.5	16.805	50	100	425	18	300	155	12	70	305	8	7
1	16.805	55	115	740	26	600	65	12	60	125	9	7
1	16.805	55	115	640	26	500	90	12	70	180	10	7
1	16.805	55	115	590	26	450	130	12	80	255	11	7
1	16.805	55	115	540	27	400	180	15	90	355	15	7
2	16.805	65	135	765	31	600	105	15	90	205	17	7
2	16.805	65	135	665	31	500	155	15	110	305	20	7
2	16.805	65	135	665	31	500	205	15	125	405	25	7
3	16.805	75	150	785	38	600	155	20	120	305	33	7
3	16.805	75	150	685	38	500	205	20	130	405	36	7
3	16.805	75	150	685	38	500	255	20	140	505	45	7

Blueprint

