



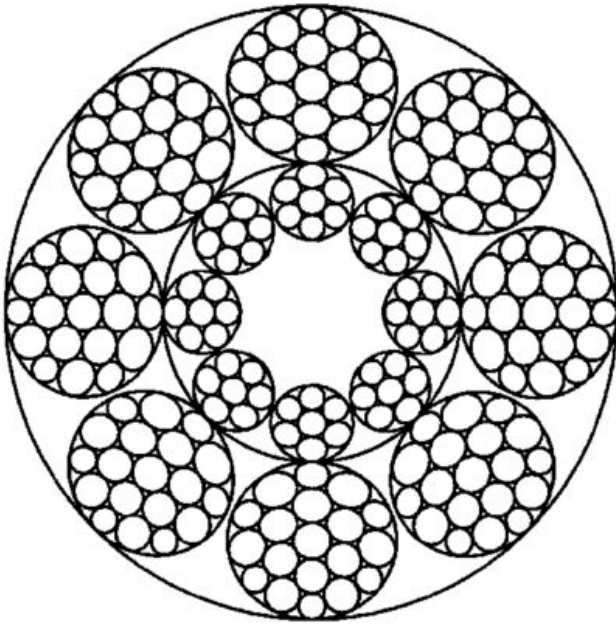

Elevator



Certlift 8S - Elevator

Product information



Typical applications: For elevators.

Features: Durable, smooth running, robust design and low elongation.

Rope construction: 8x19 Seal + IWRC.

Marking: According to standard

Finish: Ungalvanized.

Standard: EN 12385-5

Fill factor: 0.57

Part Code	Rope Diameter, mm	Min. Breaking force kN. 1370/1770 N/mm²	Min. Breaking force kN. 1570 N/mm²	Metallic cross section mm²	Weight kg/100m
106100804130129	8	36.4	36.4	27,6	24.1
106100904130129	9	46.1	46.1	35,0	30.5
106101004130129	10	56.9	56.9	43,2	37.7
106101104130129	11	68.9	68.9	52,2	45.6
106101204130129	12	82	82	62,2	54.3
106101304130129	13	96.2	96.2	73,0	63.7
106101404130129	14	111.6	111.6	84,6	73.9
106101504130129	15	128.1	128.1	97,1	84.8
106101604130129	16	145.8	145.8	110,5	96.5