


Lifting Beam Type H-SSB

Product information

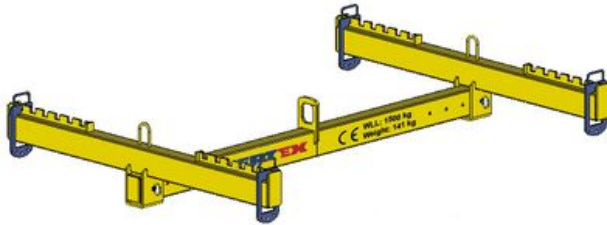

This type of lifting beam has adjustable attachment points in both directions and is based on lifting in four points. The lifting beam is designed for direct attachment with the crane hook in the central lifting eye. The attachment point is designed as an oval ring, which makes it possible to use for example a 2-part sling. Other lengths and working loads can be manufactured upon request.

Design: Lightweight welded beam construction providing good torsional stiffness.

Proof load: Usually 1,5 x WLL.

Material: Beam and plate of high-strength structural steel.

Marking: Working load limit (WLL), CE marking, manufacturer, serial number, year of manufacturing, etc.

Finish: Yellow painted. Other treatments available on request.

Note: Top sling, separate slings and other accessories to be ordered separately.

Part Code	Code	WLL ton	H mm	L1 min. mm	L1 max. mm	L2 min. mm	L2 max. mm	Weight kg	Delivery time
62056430051500	H-SSB-0,5/2-1,5	0.5	205	1,200	2,000	750	1,500	112	7
62056430052000	H-SSB-0,5/3-2	0.5	205	1,800	3,000	800	2,000	146	7
62056430052500	H-SSB-0,5/4-2,5	0.5	205	2,400	4,000	1,300	2,500	174	7
62056430151500	H-SSB-1,5/2-1,5	1.5	240	1,200	2,000	750	1,500	142	7
62056430152000	H-SSB-1,5/3-2	1.5	240	1,800	3,000	800	2,000	183	7
62056430152500	H-SSB-1,5/4-2,5	1.5	240	2,400	4,000	1,300	2,500	221	7
62056430301500	H-SSB-3/2-1,5	3	300	1,200	2,000	750	1,500	192	7
62056430302000	H-SSB-3/3-2	3	300	1,800	3,000	800	2,000	241	7
62056430302500	H-SSB-3/4-2,5	3	300	2,400	4,000	1,300	2,500	286	7
62056430501500	H-SSB-5/2-1,5	5	315	1,200	2,000	750	1,500	276	7
62056430502000	H-SSB-5/3-2	5	315	1,800	3,000	800	2,000	369	7
62056430502500	H-SSB-5/4-2,5	5	315	2,400	4,000	1,300	2,500	480	7
62056430801500	H-SSB-8/2-1,5	8	425	1,200	2,000	750	1,500	553	7
62056430802000	H-SSB-8/3-2	8	425	1,800	3,000	800	2,000	653	7
62056430802500	H-SSB-8/4-2,5	8	425	2,400	4,000	1,300	2,500	802	7
62056431001500	H-SSB-10/2-1,5	10	540	1,200	2,000	750	1,500	837	7
62056431002000	H-SSB-10/3-2	10	540	1,800	3,000	800	2,000	989	7
62056431002500	H-SSB-10/4-2,5	10	540	2,400	4,000	1,300	2,500	1,135	7

Blueprint

