


Chain sling CSX-168 grade 10

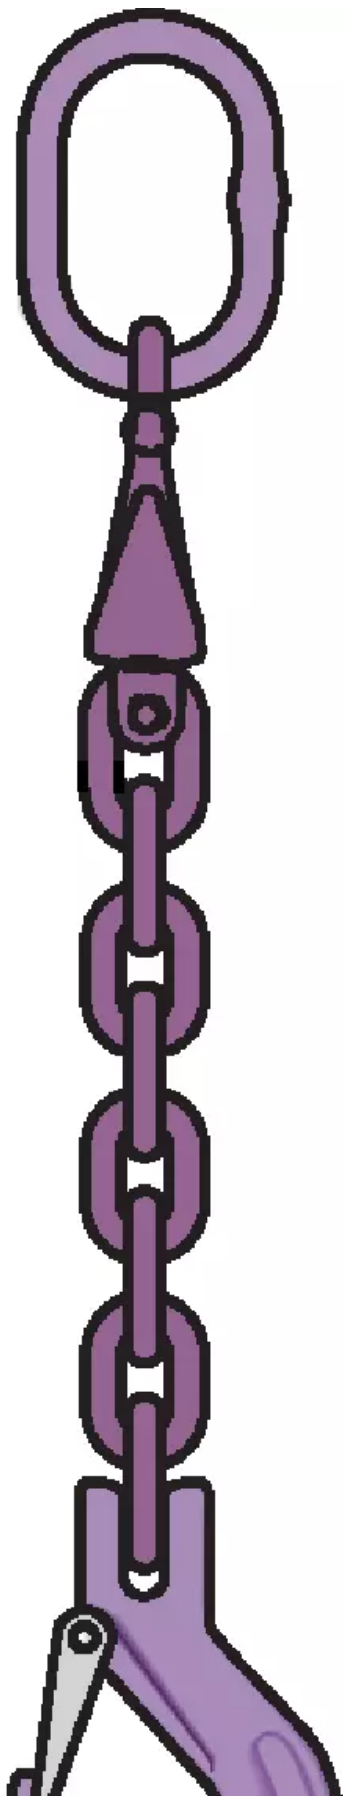

Product information

Design: Chain sling with master link and shortening hook on one end and clevis load hook on the other end.
From $\varnothing 19$ up to 26mm chain fitted with other type shortening hook and $\varnothing 26$ mm chain is fitted with an eye hook. Other combinations possible on demand.

Dimensions: \varnothing 6–26 mm (other dimensions on demand).

Material: Alloy steel.

Marking: According to standard, CE-marked

Temperature range: -40°C up to 200°C (up to 380° possible on demand)

Standard: EN 818-4

Warning: Not to be heat-treated.

Safety factor: 4:1

Grade: 10

Approved for lifting: yes



CERTEX

Lifting Solutions Group
Axel Johnson International