


Lifting Beam T-K-SL

Product information

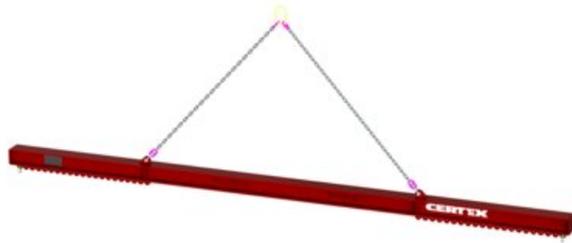

The lifting beam of the T-K-SL series has a 2-strand chain suspension for single hooks according to DIN 15401 on the crane side and shackle bars on the load side. The matching shackles are included in the scope of delivery. You are able to expand the lifting beam with additional equipment from our web shop. The lifting beam is supplied in the standard color RAL 3000 (flame red), other colors are also possible on request.

For other intermediate sizes and load capacities, you can also send us an inquiry.

Material: Construction steel

Marking: According to standard, CE-marked

Temperature range: -20 °C up to +100 °C

Finish: RAL 3000 (red flame)

Standard: EN 13155

Part code	WLL ton	Length m	D, mm	H, mm	L min. mm mm	L max. mm mm	S mm	T mm	Wmm mm	Weight kg	Delivery time
6205TKSL22000	2	1-2	887	110	1,000	2,000	50	16	60	46	49
6205TKSL23000	2	1.5-3	1,159	110	1,500	3,000	50	16	60	77	49
6205TKSL24000	2	2-4	1,440	110	2,000	4,000	50	16	60	100	49
6205TKSL25000	2	2.5-5	1,714	110	2,500	5,000	50	16	60	157	49
6205TKSL26000	2	3-6	2,001	110	3,000	6,000	50	16	60	231	49

Blueprint

