


## Superclamp S serial

---

### Product information

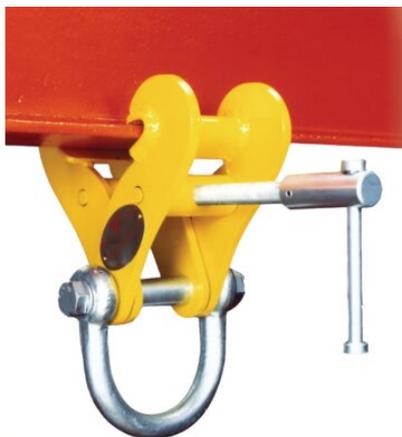

Adjustable spindle beam clamp for establishing a semi-permanent suspension point when loading at an angle.

### Properties

- Compact design and low tare weight.
- Easy mounting.

... [Read more](#)


---

**Marking:** According to standard, CE-marked

**Standard:** EN 13157, EN 12100

## Superclamp S serial

### Blueprint

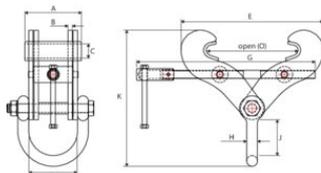

### Technical data

Part code	Code	WLL ton	Beam width mm	Model	A mm	B mm	C mm	D mm	E mm	G, mm	H, mm	J mm	K mm	Weight kg
502300201900270	8717365016721	2	76-190	S1*	125	3	22	90	188	275	20	77	250	4
502300301900270	8717365016738	3	76-190	S2*	125	6	22	90	188	275	20	77	250	5.1
502300301900270	8717365016745	3	76-190	S2A*	130	12.5	22	102	250	275	20	103	268	7.4
502300402540270	8717365016752	4	150-254	S3*	130	10	22	112	327	410	25	98	332	10.4
502300501900270	8717365016769	5	76-190	S3X	130	12.5	22	116	237	295	25	110	300	9
502300503050270	8717365016776	5	150-305	S3A*	140	12.5	32	116	373	410	25	110	360	14.9
502300604570270	8717365016790	6	203-457	S4S	140	12.5	42	116	498	560	25	110	459	18.8
502300702280270	8717365016783	7	101-228	S4	140	12.5	42	118	323	410	32	120	382	17.5
502301004570270	8717365016806	10	203-457	S4A	140	20	42	118	498	560	32	112	476	27.3
502301504570270	8717365016813	15	203-457	S12	170	20	50	116.5	611	660	40	185	616	53.8
502301506100270	8717365016820	15	406-610	S14	175	20	63	116.5	795	810	40	185	673	63