


## Clevis Shackle X-066, painted grade 100 shackle

---

### Product information

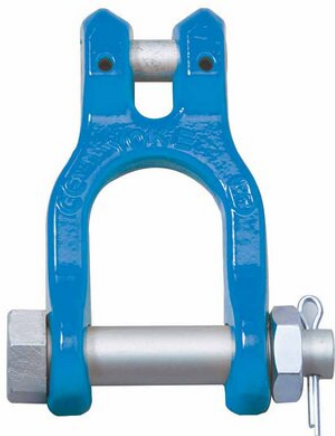

- At least 25% greater WLL than traditional Grade 8 products.
- Proof Load tested at 2.5 times the WLL with certification for each batch manufactured. Fatigue rated to 20,000 cycles at 1.5 times the WLL.
- Tempering temperature minimum 400°C.
- Magnaflux crack detection is performed 100% on each batch.
- Manufactured in accordance with EN 1677- 1 and ASME B30.26.

When fitting G10 components are added to G8 chain, the sling is rated at G8 WLL  
... [Read more](#)

---

**Material:** Quenched and Tempered Alloy Steel

**Marking:** According to standard, Size, grade, manufacturer ID, traceability

**Temperature range:** -40° up to +200°C (without reduction in WLL).

**Finish:** Blue painted


**Standard:** EN 1677-1

**Safety factor:** 4:1

**Grade:** 10

## Clevis Shackle X-066, painted grade 100 shackle

### Blueprint

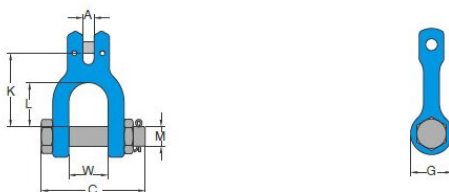

### Technical data

Part code	Chain diameter mm	WLL ton	EWL mm	Weight kg
420100250950	7-8	2.5	59	0.4
420100400950	10	4	78	0.8
420100670950	13	6.7	98	1.4
420101000950	16	10	112	2.5