


Certlift 8S - Elevator

Product information

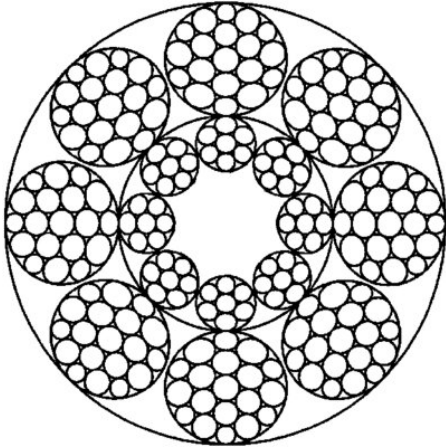

Typical applications: For elevators.

[... Read more](#)

Features: Durable, smooth running, robust design and low elongation.

Rope construction: 8x19 Seal + IWRC.


Marking: According to standard

Finish: Ungalvanized.

Standard: EN 12385-5

Fill factor: 0.57

Elevator



Certlift 8S - Elevator

Technical data

Part code	Rope diameter mm	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
106100804130129	8	1,370/1,770	Bright	sZ	36.4	-	SupplierStandard	24.1
106100804020129	8	1,570	Bright	sZ	36.4	-	SupplierStandard	24.1
106100904130129	9	1,370/1,770	Bright	sZ	46.1	-	SupplierStandard	30.5
106100904020129	9	1,570	Bright	sZ	46.1	-	SupplierStandard	30.5
106101004130129	10	1,370/1,770	Bright	sZ	56.9	-	SupplierStandard	37.7
106101004020129	10	1,570	Bright	sZ	56.9	-	SupplierStandard	37.7
106101104130129	11	1,370/1,770	Bright	sZ	68.9	-	SupplierStandard	45.6
106101104020129	11	1,570	Bright	sZ	68.9	-	SupplierStandard	45.6
106101204130129	12	1,370/1,770	Bright	sZ	82	-	SupplierStandard	54.3
106101204020129	12	1,570	Bright	sZ	82	-	SupplierStandard	54.3
106101304130129	13	1,370/1,770	Bright	sZ	96.2	-	SupplierStandard	63.7
106101304020129	13	1,570	Bright	sZ	96.2	-	SupplierStandard	63.7
106101404130129	14	1,370/1,770	Bright	sZ	111.6	-	SupplierStandard	73.9
106101404020129	14	1,570	Bright	sZ	111.6	-	SupplierStandard	73.9
106101504130129	15	1,370/1,770	Bright	sZ	128.1	-	SupplierStandard	84.8
106101504020129	15	1,570	Bright	sZ	128.1	-	SupplierStandard	84.8
106101604130129	16	1,370/1,770	Bright	sZ	145.8	-	SupplierStandard	96.5
106101604020129	16	1,570	Bright	sZ	145.8	-	SupplierStandard	96.5