


Steel Wire Rope Ropetex 55

Product information



ROPETEX

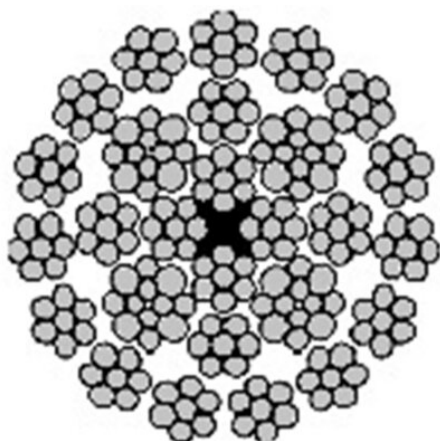

Excellent Resistance to Rotation giving over three times more lifting height than a conventional 18 x 7 class rope. Flexibility is optimised by the unique strand and rope construction. Langs Lay construction combines excellent wear characteristics with efficient spooling on the drum.

RopeTex Ropes are lubricated with the very latest High Performance Wire rope lubricants to give excellent corrosion protection, fatigue life combined with low fling off

ISO 4309 Rope Category No: All Diameters RCN.23-1

[... Read more](#)

Features: Very High Breaking Load

Material: High Carbon Steel

Marking: According to standard

Finish: Galvanised as standard

Standard: EN 12385-4

Fill factor: 0,64

RCN: 23-1

Steel Wire Rope Ropetex 55

Technical data

Part code	Rope diameter	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
102100806300069	8	2,160	Galvanized	zZ	50.5	-	SupplierStandard	27.6
102100806270069	8	1,960	Galvanized	zZ	-	-	SupplierStandard	27.6
102100906300069	9	2,160	Galvanized	zZ	64	-	SupplierStandard	34.4
102100906270069	9	1,960	Galvanized	zZ	-	-	SupplierStandard	34.4
102101006300069	10	2,160	Galvanized	zZ	79	-	SupplierStandard	43
102101006270069	10	1,960	Galvanized	zZ	-	-	SupplierStandard	43
102101106300069	11	2,160	Galvanized	zZ	95.6	-	SupplierStandard	52
102101106270069	11	1,960	Galvanized	zZ	-	-	SupplierStandard	52
102101206300069	12	2,160	Galvanized	zZ	114	-	SupplierStandard	62
102101206270069	12	1,960	Galvanized	zZ	-	-	SupplierStandard	62
102101306300069	13	2,160	Galvanized	zZ	134	-	SupplierStandard	72
102101306270069	13	1,960	Galvanized	zZ	-	-	SupplierStandard	72
102101406300069	14	2,160	Galvanized	zZ	155	-	SupplierStandard	84
102101406270069	14	1,960	Galvanized	zZ	-	-	SupplierStandard	84
102101506300069	15	2,160	Galvanized	zZ	178	-	SupplierStandard	96
102101506270069	15	1,960	Galvanized	zZ	-	-	SupplierStandard	96
102101606300069	16	2,160	Galvanized	zZ	202	-	SupplierStandard	110
102101606270069	16	1,960	Galvanized	zZ	-	-	SupplierStandard	110
102101706300069	17	2,160	Galvanized	zZ	228	-	SupplierStandard	120
102101706270069	17	1,960	Galvanized	zZ	-	-	SupplierStandard	120
102101806300069	18	2,160	Galvanized	zZ	256	-	SupplierStandard	135
102101806270069	18	1,960	Galvanized	zZ	-	-	SupplierStandard	135
102101906300069	19	2,160	Galvanized	zZ	285	-	SupplierStandard	150
102101906270069	19	1,960	Galvanized	zZ	-	-	SupplierStandard	150
102102006300069	20	2,160	Galvanized	zZ	316	-	SupplierStandard	166
102102006270069	20	1,960	Galvanized	zZ	-	-	SupplierStandard	166
102102206300069	22	2,160	Galvanized	zZ	382	-	SupplierStandard	201
102102206270069	22	1,960	Galvanized	zZ	-	-	SupplierStandard	201
102102406300069	24	2,160	Galvanized	zZ	455	-	SupplierStandard	245
102102406270069	24	1,960	Galvanized	zZ	-	-	SupplierStandard	245
102102606300069	26	2,160	Galvanized	zZ	527	-	SupplierStandard	297

Steel Wire Rope Ropetex 55

Technical data

Part code	Rope diameter	Tensile strength N/mm ²	Finish	Rope lay	Min. breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
102102606270069	26	1,960	Galvanized	zZ	-	-	SupplierStandard	297
102102806300069	28	2,160	Galvanized	zZ	612	-	SupplierStandard	345
102102806270069	28	1,960	Galvanized	zZ	-	-	SupplierStandard	345