


Oversize Master Link assembly Pewag VLWP 2/4

Product information

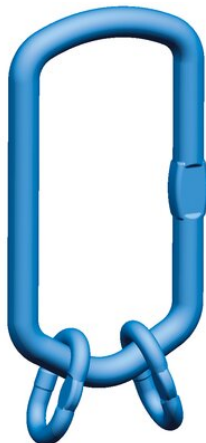

The new oversize lifting eye stands out for its asymmetrical shape and is suitable for the assembly of II- and IV-leg chain slings, in the assembled system.

The improved design of the upper curve optimises the contact surface of the assembly on the single or double hook, manufactured according to DIN 15401 resp. DIN 15402. The great plus of this master link assembly is the geometry of the lower area, which allows for the simple and quick assessment of the angle of the inclination, thus greatly increasing safety and efficiency during day-to-day operations and making miscalculations a thing of the past.

Extra-large rings make this master link assembly the perfect partner for crane hooks according to DIN 15401 up to no. 25.

[... Read more](#)

Material: Alloy steel

Marking: According to standard, CE-marked, Pewag or PW, winner pro or 12, H16, batch code and type.

Temperature range: -60°C up to +300°C

Finish: Light blue powdercoated.

Standard: EN 1677-4


Warning: Not to be heat-treated.

Safety factor: 4:1

Grade: 12

Oversize Master Link assembly Pewag VLWP 2/4

Blueprint



Technical data

Part code	Code	WLL ton	For chain, 2-leg mm	For chain, 3-4-leg mm	d mm	d1 mm	e mm	t mm	t1 mm	w mm	w1 mm	Weight kg
403100430040	VLWP 2-7/8	4.25	-	-	23	13	394	340	54	155	25	3.6
403100710040	VLWP 2-10/4-7/8	7.1	10	7/8	27	17	410	340	70	155	34	5.2
403101120040	VLWP 2-13/4-10	11.2	13	10	33	20	425	340	85	155	40	8
403101700040	VLWP 4-13	17	-	-	38	27	480	340	140	155	65	12.8
403101750040	VLWP 2-16	17.5	-	-	38	-	340	340	-	155	-	8.9
403102650040	VLWP 4-16	26.5	-	-	40	33	490	340	150	155	70	16.3