

Powertex Hebebänder - EN 1492-2

Certex Hebebänder aus Polyester Wir bevorraten große Mengen an Hebebändern in Standardabmessungen.

Certex fertigt Hebebänder mit verschiedenen Endbestückungen direkt mit dem Hebeband oder mittels spezieller Textilverbinder verbunden. Hinweise zu geeigneten Abrieb- und Kantenschutz finden sie auf den Seiten 132 bis 134. Wir fertigen Sonderhebebänder von 1 bis 20t Tragfähigkeit auf Anfrage.

Powertex Hebebänder werden individuell verpackt, gekennzeichnet und mit Zertifikat geliefert.



Hebebänder in 4-lagiger Ausführung auf Anfrage

POWERTEX®



Powertex Webbing Sling - EN 1492-2

Webbing slings of polyester.

We are stocking a large number of webbing slings in standard lengths.

Webbing slings are also manufactured with protections and with accessories directly mounted into the webbing slings or with textile-sling connectors. Furthermore we are able to deliver a wide range of protections for webbings, detailed information find on pages 132 to 134.

We also manufacture webbing slings on request.

Webbing slings can be delivered from 1 ton to 20 ton.

Powertex webbing slings are delivered standard individually packed, marked and with certificate.



Art. Nr.	2-Lagig WLL kg	4-Lagig WLL kg	Breite	Farbe
06-200101	1.000	2.000	30 mm	Violet
06-200201	2.000	4.000	60 mm	Grün
06-200301	3.000	6.000	90 mm	Gelb
06-200402	4.000	8.000	120 mm	Grau
06-200502	5.000	10.000	150 mm	Rot
06-200602	6.000	12.000	180 mm	Braun
06-200802	8.000	16.000	240 mm	Blau
06-201002	10.000	20.000	300 mm	Orange

Hebebänder & Zurrgurte

Hebebänder

Tragfähigkeitstabelle

Load Diagram

Sicherheitsfaktor 7:1		Direkt	Umlegt	Geschnürt	Umlegt		2 Strang		3-4 Strang	
Neigungswinkel					0 - 45°	45° - 60°	0 - 45°	45° - 60°	0 - 45°	45° - 60°
Faktor		1	2	0,8	1,4	1	1,4	1	2,1	1,5
Bandbreite	Tragfähigkeit kg									
30 mm	1.000	2.000	800	1.400	1.000	1.400	1.000	2.100	1.500	
60 mm	2.000	4.000	1.600	2.800	2.000	2.800	2.000	4.200	3.000	
90 mm	3.000	6.000	2.400	4.200	3.000	4.200	3.000	6.300	4.500	
120 mm	4.000	8.000	3.200	5.600	4.000	5.600	4.000	8.400	6.000	
150 mm	5.000	10.000	4.000	7.000	5.000	7.000	5.000	10.500	7.500	
180 mm	6.000	12.000	4.800	8.400	6.000	8.400	6.000	12.600	9.000	
240 mm	8.000	16.000	6.400	11.200	8.000	11.200	8.000	16.800	12.000	
300 mm	10.000	20.000	8.000	14.000	10.000	14.000	10.000	21.000	15.000	



Ausführungen Hebebänder gem. DIN EN 1492-1

Polyester Webbing Sling acc. to DIN EN1492-1

Hebebänderausführungen

- Typ A: 1/1 Schlaufenbreite
 Typ B: Verjüngte Endschlaufen (Standard)
 Typ O: Endlos genähte Hebebänder

Types of lifting slings:

- Type A: 1/1 sleeve
 Type B: Rejuvenate sleeve (standard)
 Type O: Endless




Art. Nr./Band	Bandbreite mm	Typ A	Typ B	Typ O	C-Bügel	C-CR Bügel
06-601100501	50	X	X	X	X	X
06-601100601	60	X	X	X	X	X
06-601100751	90	X	X	X	X	X
06-601101001	120	X	X	X	X	X
06-601101501	150	X	X	X	X	X
06-601101801	180	X	X	X	-	-
06-601102401	240	X	X	X	-	-
06-601103001	300	X	X	X	-	-

Sicherheitsfaktor 7:1

Safety factor 7:1

1-lagige Bandschlingen / Simplex

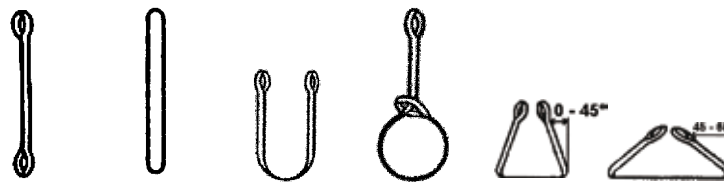

Art. Nr./Band	Bandbreite mm	WLL kg	WLL kg	WLL kg	WLL kg	WLL kg	WLL kg
06-601100501	50	850	1.700	1.700	680	1.190	850
06-601100601	60	950	1.900	1.900	760	1.330	950
06-601100751	75	1.500	3.000	3.000	1.200	2.100	1.500
06-601101001	100	1.900	3.800	3.800	1.520	2.660	1.900
06-601101501	150	2.500	5.000	5.000	2.000	3.500	2.500
06-601101801	180	3.000	6.000	6.000	2.400	4.200	3.000
06-601102401	240	4.100	8.200	8.200	3.280	5.740	4.100
06-601103001	300	5.700	11.400	11.400	4.560	7.980	5.700

Sicherheitsfaktor 7:1

Safety factor 7:1




Hebeband 1-lagig mit Schlaufen Typ A



Endloshebeband 1-lagig Typ O

2-lagige Bandschlingen / Duplex

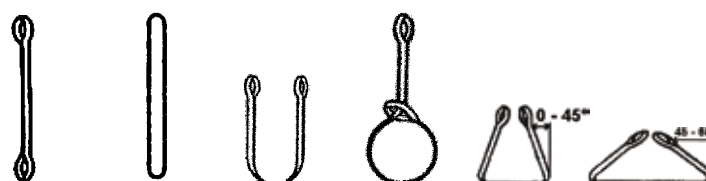

Art. Nr./Band	Bandbreite mm	WLL kg	WLL kg	WLL kg	WLL kg	WLL kg	WLL kg
06-601100501	50	1.700	3.400	3.400	1.360	2.380	1.700
06-601100601	60	1.900	3.800	3.800	1.520	2.660	1.900
06-601100751	75	3.000	6.000	6.000	2.400	4.200	3.000
06-601101001	100	3.800	7.600	7.600	3.040	5.320	3.800
06-601101501	150	5.000	10.000	10.000	4.000	7.000	5.000
06-601101801	180	6.000	12.000	12.000	4.800	8.400	6.000
06-601102401	240	8.200	16.400	16.400	6.560	11.480	8.200
06-601103001	300	11.400	22.800	22.800	9.120	15.960	11.400

Sicherheitsfaktor 7:1

Safety factor 7:1



Hebeband 2-lagig mit Schlaufen Typ A



Endloshebeband 2-lagig Typ O

Hebebänder & Zurrgurte

Hebebänder