


S1 polyester flat webbing slings with reinforced eyes

Product information

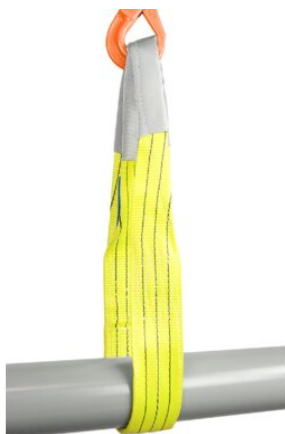

This professional webbing sling is extremely suitable for intensive industrial use.

Packaging



SEMI-BIODEGRADABLE

Packaged in semi-biodegradable plastic.

Properties

- Duplex hoisting belt; double strap layers.
- Extra strong, water- and dirt-repellent, impregnated fabric guarantees a longer life.
- WLL stripes, each stripe is 1 ton (up to 10 tons).
- Every 30 mm band width is 1 ton load capacity.

... [Read more](#)

Material: polyester

Marking: According to standard, CE-marked

Standard: EN 1492-1

Note: Packed in plastic including REMA manual.

S1 polyester flat webbing slings with reinforced eyes

Technical data

Part code	GTIN No.	WLL	EWL	WLL Straight Lift ton	Choke Hitch ton	Basket Hitch 0° ton	Basket Hitch 0-45° ton	Basket Hitch 45°-60° ton	WLL 45-60° t	Length	Webbing width mm	Model	Colour	Weight
R1211031	8717365003714	1	1	1	0.8	2	1.4	1	1	-	30	S1-PE-1t-1M	Purple	0.25
R1211033	8717365003721	1	1.5	1	0.8	2	1.4	1	1	1.5	30	S1-PE-1t-1,5M	Purple	0.5
R1211037	8717365003745	1	3	1	0.8	2	1.4	1	1	3	30	S1-PE-1t-3M	Purple	0.7
R1211035	8717365003738	1	2	1	0.8	2	1.4	1	1	2	30	S1-PE-1t-2M	Purple	0.76
R1211039	8717365003752	1	4	1	0.8	2	1.4	1	1	4	30	S1-PE-1t-4M	Purple	0.9
R1211041	8717365003769	1	5	1	0.8	2	1.4	1	1	5	30	S1-PE-1t-5M	Purple	1.07
R1211043	8717365003776	1	6	1	0.8	2	1.4	1	1	6	30	S1-PE-1t-6M	Purple	1.3
R1211045	8717365003783	1	7	1	0.8	2	1.4	1	1	7	30	S1-PE-1t-7M	Purple	1.7
R1211047	8717365003790	1	8	1	0.8	2	1.4	1	1	8	30	S1-PE-1t-8M	Purple	1.9
R1211049	8717365003806	1	9	1	0.8	2	1.4	1	1	9	30	S1-PE-1t-9M	Purple	1.9
R1211051	8717365003813	1	10	1	0.8	2	1.4	1	1	10	30	S1-PE-1t-10M	Purple	2.1
R1211061	8717365003820	2	1	2	1.6	4	2.8	2	2	1	60	S1-PE-2t-1M	Green	0.6
R1211063	8717365003837	2	1.5	2	1.6	4	2.8	2	2	1.5	60	S1-PE-2t-1,5M	Green	0.9
R1211065	8717365003844	2	2	2	1.6	4	2.8	2	2	2	60	S1-PE-2t-2M	Green	1.3
R1211069	8717365003868	2	4	2	1.6	4	2.8	2	2	4	60	S1-PE-2t-4M	Green	1.45
R1211067	8717365003851	2	3	2	1.6	4	2.8	2	2	3	60	S1-PE-2t-3M	Green	1.8
R1211071	8717365003875	2	5	2	1.6	4	2.8	2	2	5	60	S1-PE-2t-5M	Green	1.8
R1211073	8717365003882	2	6	2	1.6	4	2.8	2	2	6	60	S1-PE-2t-6M	Green	2.5
R1211075	8717365003899	2	7	2	1.6	4	2.8	2	2	7	60	S1-PE-2t-7M	Green	2.9
R1211077	8717365003905	2	8	2	1.6	4	2.8	2	2	8	60	S1-PE-2t-8M	Green	3.25

S1 polyester flat webbing slings with reinforced eyes

Technical data

Part code	GTIN No.	WLL	EWL	WLL Straight Lift ton	Choke Hitch ton	Basket Hitch 0° ton	Basket Hitch 0-45° ton	Basket Hitch 45°-60° ton	WLL 45-60° t	Length	Webbing width mm	Model	Colour	Weight
R1211079	8717365003912	2	9	2	1.6	4	2.8	2	2	9	60	S1-PE-2t-9M	Green	3.75
R1211081	8717365003929	2	10	2	1.6	4	2.8	2	2	10	60	S1-PE-2t-10M	Green	4.2
R1211091	8717365003936	3	1	3	2.4	6	4.2	3	3	1	90	S1-PE-3t-1M	Yellow	0.75
R1211093	8717365003943	3	1.5	3	2.4	6	4.2	3	3	1.5	90	S1-PE-3t-1,5M	Yellow	1
R1211095	8717365003950	3	2	3	2.4	6	4.2	3	3	2	90	S1-PE-3t-2M	Yellow	1.35
R1211097	8717365003967	3	3	3	2.4	6	4.2	3	3	3	90	S1-PE-3t-3M	Yellow	2.25
R1211099	8717365003974	3	4	3	2.4	6	4.2	3	3	4	90	S1-PE-3t-4M	Yellow	2.7
R1211101	8717365003981	3	5	3	2.4	6	4.2	3	3	5	90	S1-PE-3t-5M	Yellow	3.75
R1211103	8717365003998	3	6	3	2.4	6	4.2	3	3	6	90	S1-PE-3t-6M	Yellow	3.85
R1211105	8717365004001	3	7	3	2.4	6	4.2	3	3	7	90	S1-PE-3t-7M	Yellow	3.85
R1211107	8717365004018	3	8	3	2.4	6	4.2	3	3	8	90	S1-PE-3t-8M	Yellow	4.2
R1211109	8717365004025	3	9	3	2.4	6	4.2	3	3	9	90	S1-PE-3t-9M	Yellow	5.35
R1211111	8717365004032	3	10	3	2.4	6	4.2	3	3	10	90	S1-PE-3t-10M	Yellow	7.5
R1211125	8717365004049	4	2	4	3.2	8	5.6	4	4	2	120	S1-PE-4t-2M	Grey	2.05
R1211127	8717365004315	4	3	4	3.2	8	5.6	4	4	3	120	S1-PE-4t-3M	Grey	3.6
R1211129	8717365004063	4	4	4	3.2	8	5.6	4	4	4	120	S1-PE-4t-4M	Grey	3.7
R1211131	8717365004070	4	5	4	3.2	8	5.6	4	4	5	120	S1-PE-4t-5M	Grey	4.6
R1211133	8717365004087	4	6	4	3.2	8	5.6	4	4	6	120	S1-PE-4t-6M	Grey	5.05
R1211135	8717365004094	4	7	4	3.2	8	5.6	4	4	7	120	S1-PE-4t-7M	Grey	6.2
R1211137	8717365004100	4	8	4	3.2	8	5.6	4	4	8	120	S1-PE-4t-8M	Grey	6.2

S1 polyester flat webbing slings with reinforced eyes

Technical data

Part code	GTIN No.	WLL	EWL	WLL Straight Lift ton	Choke Hitch ton	Basket Hitch 0° ton	Basket Hitch 0-45° ton	Basket Hitch 45°-60° ton	WLL 45-60° t	Length	Webbing width mm	Model	Colour	Weight
R1211139	8717365004117	4	9	4	3.2	8	5.6	4	4	9	120	S1-PE-4t-9M	Grey	7.05
R1211141	8717365004124	4	10	4	3.2	8	5.6	4	4	10	120	S1-PE-4t-10M	Grey	8.25
R1211155	8717365020032	5	2	5	4	10	7	5	5	2	150	S1-PE-5t-2M	Red	2.05
R1211157	8717365004148	5	3	5	4	10	7	5	5	3	150	S1-PE-5t-3M	Red	3.5
R1211159	8717365004155	5	4	5	4	10	7	5	5	4	150	S1-PE-5t-4M	Red	3.75
R1211161	8717365004162	5	5	5	4	10	7	5	5	5	150	S1-PE-5t-5M	Red	4.6
R1211163	8717365004179	5	6	5	4	10	7	5	5	6	150	S1-PE-5t-6M	Red	5.4
R1211165	8717365004186	5	7	5	4	10	7	5	5	7	150	S1-PE-5t-7M	Red	12.6
R1211167	8717365004193	5	8	5	4	10	7	5	5	8	150	S1-PE-5t-8M	Red	14.4
R1211169	8717365004209	5	9	5	4	10	7	5	5	9	150	S1-PE-5t-9M	Red	16.2
R1211171	8717365004216	5	10	5	4	10	7	5	5	10	150	S1-PE-5t-10M	Red	18
R1211187	8717365004230	6	3	6	4.8	12	8.4	6	6	3	180	S1-PE-6t-3M	Brown	7.5
R1211189	8717365004247	6	4	6	4.8	12	8.4	6	6	4	180	S1-PE-6t-4M	Brown	10
R1211191	8717365004254	6	5	6	4.8	12	8.4	6	6	5	180	S1-PE-6t-5M	Brown	12.5
R1211193	8717365020339	6	6	6	4.8	12	8.4	6	6	6	180	S1-PE-6t-6M	Brown	15
R1211195	8717365004278	6	7	6	4.8	12	8.4	6	6	7	180	S1-PE-6t-7M	Brown	17.5
R1211197	8717365004285	6	8	6	4.8	12	8.4	6	6	8	180	S1-PE-6t-8M	Brown	20
R1211199	8717365004292	6	9	6	4.8	12	8.4	6	6	9	180	S1-PE-6t-9M	Brown	22.5
R1211201	8717365004308	6	10	6	4.8	12	8.4	6	6	10	180	S1-PE-6t-10M	Brown	25
R1211217	8717365020346	8	3	8	6.4	16	11.2	8	8	3	240	S1-PE-8t-3M	Blue	8.7

S1 polyester flat webbing slings with reinforced eyes

Technical data

Part code	GTIN No.	WLL	EWL	WLL Straight Lift ton	Choke Hitch ton	Basket Hitch 0° ton	Basket Hitch 0-45° ton	Basket Hitch 45°-60° ton	WLL 45-60° t	Length	Webbing width mm	Model	Colour	Weight
R1211219	8717365004322	8	4	8	6.4	16	11.2	8	8	4	240	S1-PE-8t-4M	Blue	11.6
R1211221	8717365004339	8	5	8	6.4	16	11.2	8	8	5	240	S1-PE-8t-5M	Blue	14.5
R1211223	8717365004346	8	6	8	6.4	16	11.2	8	8	6	240	S1-PE-8t-6M	Blue	17.4
R1211225	8717365004353	8	7	8	6.4	16	11.2	8	8	7	240	S1-PE-8t-7M	Blue	20.3
R1211227	8717365004360	8	8	8	6.4	16	11.2	8	8	8	240	S1-PE-8t-8M	Blue	23.2
R1211229	8717365004377	8	9	8	6.4	16	11.2	8	8	9	240	S1-PE-8t-9M	Blue	26.1
R1211231	8717365004384	8	10	8	6.4	16	11.2	8	8	10	240	S1-PE-8t-10M	Blue	29
R1211247	8717365004391	10	3	10	8	20	14	10	10	3	300	S1-PE-10t-3M	Orange	10.8
R1211249	8717365004407	10	4	10	8	20	14	10	10	4	300	S1-PE-10t-4M	Orange	14.4
R1211251	8717365004414	10	5	10	8	20	14	10	10	5	300	S1-PE-10t-5M	Orange	18
R1211253	8717365004421	10	6	10	8	20	14	10	10	6	300	S1-PE-10t-6M	Orange	21.6
R1211255	8717365004438	10	7	10	8	20	14	10	10	7	300	S1-PE-10t-7M	Orange	25.2
R1211257	8717365004445	10	8	10	8	20	14	10	10	8	300	S1-PE-10t-8M	Orange	28.8
R1211259	8717365004452	10	9	10	8	20	14	10	10	9	300	S1-PE-10t-9M	Orange	32.4
R1211261	8717365004469	10	10	10	8	20	14	10	10	10	300	S1-PE-10t-10M	Orange	36